


PAVEMENT REQUIREMENTS

1. ALL CROWNS SHALL BE PARABOLIC AND SHALL CONFORM TO THE FOLLOWING UNLESS OTHERWISE NOTED:

| STR | EET | WIDTH | CROWN AT | G |
|-----|-----|-------|------------|---|
| 32' | TO | 35' | 4" | |
| 36' | TO | 44' | 6" | |
| 48' | TO | 56' | 7 1/2" | |
| 60' | TO | 72' | 9" | |
| 88' | TO | 112' | 11" TO 14" | |

- 2. ASPHALTIC CONCRETE TO BE TYPE "D" MIX UNLESS OTHERWISE STATED ON THE PLAN SHEET.
- 3. ALL EXISTING PAVEMENT TO BE SAW-CUT WHERE IT TIES TO THE NEW PAVEMENT.

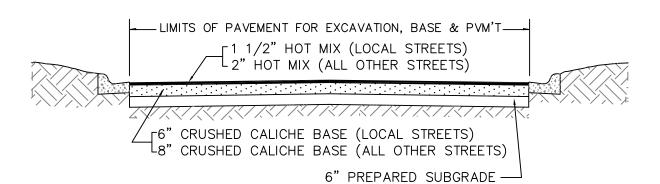

TYPICAL SECTION SCALE: N.T.S.

ILE: SS 4